



WM7614B: Quad HD/SD Analog Video Decoder

WM7614B is a quad analog composite video decoding chip that supports both HDcctv and CVBS protocols up to 4-channel 4K@30fps. WM7614B converts the received high-definition analog composite video signal through analog-to-digital conversion, video decoding, and 2D image processing into YUV format, which is then transmitted to the master chip via MIPI interface, enabling real-time preview and recording.

WM7614B supports down-stream audio data transmission over coaxial cable from remote camera. It also supports bidirectional data communication with camera for remote camera control and firmware upgrades. By integrating video, audio, and control data transmission into a single cable, it simplifies wiring requirements and enhances the ease of installation and debugging.

WM7614B features an embedded audio codec with 5-channel Line-In and 1-channel Line-Out interfaces, enabling 5-channel analog audio capture and 1-channel analog audio output. This facilitates voice recording and intercom applications, simplifying product design.

Features

VI	<ul style="list-style-type: none">● 4-channel analog composite video decoding● Supports 1M/2M/3M/4M/5M RT, 6M/8M NRT video format and CVBS format● Supports manually extended video format● Embedded Equalizer (EQ) amplifier for best extended reach performance● High speed 10-bit Analog-to-Digital (ADC) for video signal sampling● Programmable clamp control
Video Decoder	<ul style="list-style-type: none">● Enhanced automatic format recognition for video signal identification● Supports AGC, ACC, White Peak● Brightness, Saturation, Contrast, Hue, and Sharpness adjustment● Advanced sync processor for best signal performance● Automatic frequency deviation compensation to accurate color demodulation● Integrated programmable high quality filter for Y/C separation
Audio	<ul style="list-style-type: none">● 5-channel analog audio Line-In with PGA and digital processing● 1-channel analog audio Line-Out with filter and gain control● Supports 8 or 16KHz sampling rate with a max resolution of 16-bit● Supports down-stream coaxial audio over video● Cascade-able up to 4 chips

Features

	<ul style="list-style-type: none">● Supports 1-channel I2S for audio record and 1-channel I2S for audio playback● I2S supports multiple channel output
VO	<ul style="list-style-type: none">● MIPI CSI-2 v1.2 4Lane*2● Up to 1.5Gbps/Lane● YUV422 8-bit data format● Supports P/N swap for each Lane● Programmable 1Lane/2Lane/4Lane application mode● Supports clock continue mode or non-continue mode
Bidirectional Communication	<ul style="list-style-type: none">● Programmable up-stream data sending over cable● Programmable down-stream data decoding● Supports firmware upgrades for remote cameras


Peripherals

Video Interfaces	VI	<ul style="list-style-type: none">● 4-channel analog video input
	VO	<ul style="list-style-type: none">● MIPI CSI-2 4Lane*2
Audio Interfaces	Line-In	<ul style="list-style-type: none">● 5-channel
	Line-Out	<ul style="list-style-type: none">● 1-channel
	Cascade	<ul style="list-style-type: none">● 1-channel
	I2S	<ul style="list-style-type: none">● 1-channel for audio record● 1-channel for audio playback
PTZ		<ul style="list-style-type: none">● 4-channel
Other Interfaces		<ul style="list-style-type: none">● Interrupt interface for video loss● I2C● 27MHz crystal or clock input

Physical Specs

Operating Voltage	<ul style="list-style-type: none">● 1.1V core voltage● 3.3V I/O voltage● 2.5V analog voltage
Package	<ul style="list-style-type: none">● 10 mm × 10 mm BGA193

WM7614B Block Diagram

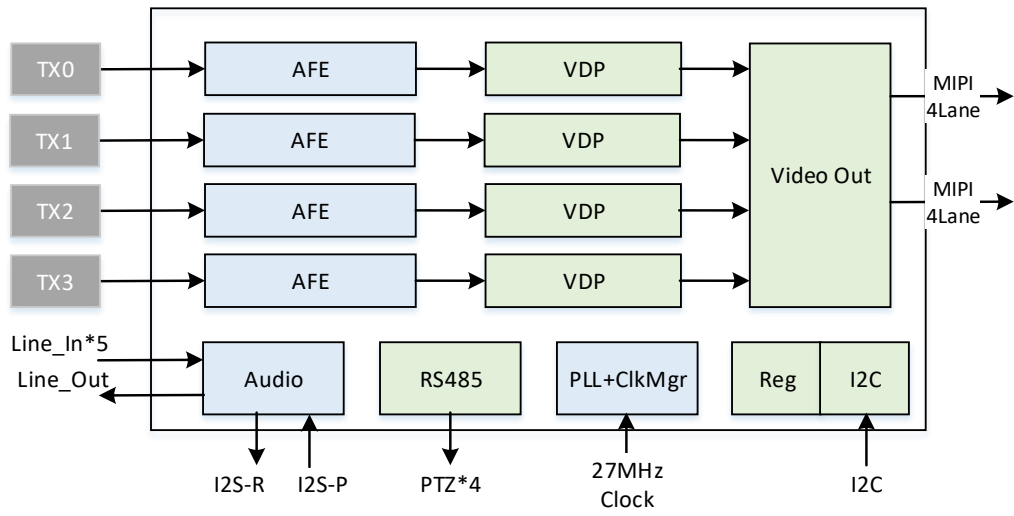

DVR Solution

